

# EFI-2 A 25/0.3



## Specifications

ETI Code	002064522
Description	EFI-2 A 25/0.3
Weight	185
Level	Residual current circuit breakers RCCB and accessories
Function	RCCB
Rated current (A)	25
Type	A
Rated residual current (A)	0,3
Rated voltage (V)	230
No. Of poles	2
Catalogue Group	EFI-2 A, AC A and AC type

[Online product page](#)

## Other documentation



[EU declaration](#)

[Technical data catalogue](#)

[3D Model](#)

[Instruction manual](#)




## ETIM international clasification

Mounting method	EV004369
Built-in depth	69mm
Nominal rated current	25 A
Nominal rated voltage	230V
Rated insulation voltage $U_i$	V
Number of poles	2
Rated fault current	0,3 A
Leakage current type	A
Selective protection	
Short-circuit breaking capacity ( $I_{cw}$ )	10kA
Surge current capacity	kA
Pollution degree	NULL
Width in number of modular spacings	2
Short-time delayed tripping	
Frequency	50 Hz
Degree of protection (IP)	IP20
Rated short-circuit breaking capacity IEC 60947-2	kA

Connectable conductor cross section solid-core	mm <sup>2</sup>
Connectable conductor cross section multi-wired	mm <sup>2</sup>
With interlocking device	NULL
Ambient temperature during operating	°C
Additional equipment possible	
Rated impulse withstand voltage U <sub>imp</sub>	kV

## Dimension drawing

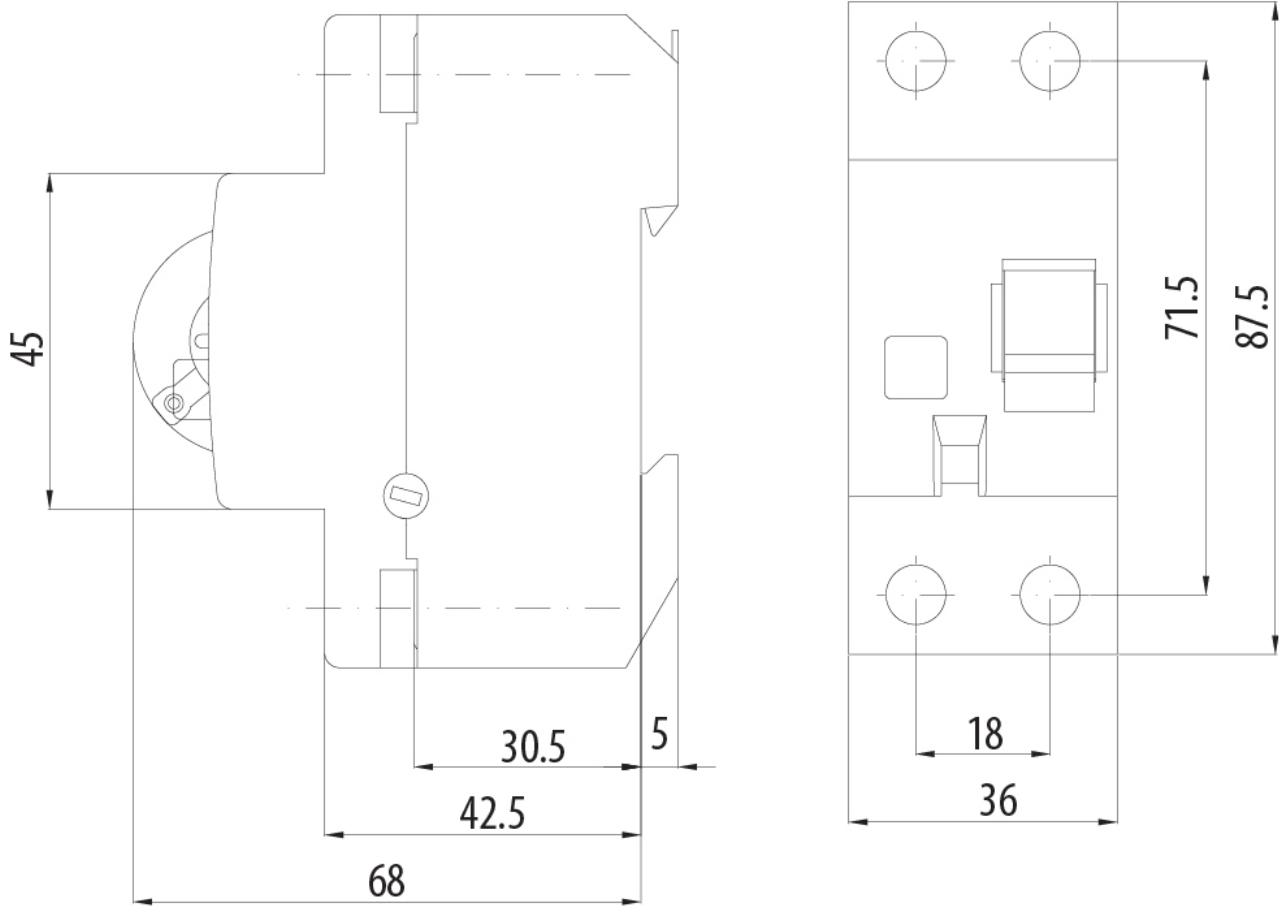

EFI-2 16-80 A